


SLICKLINE ASSISTANT WORKBOOK

IMPORTANT NOTE:

1. Your point of reference to complete this workbook may be obtained from the following
 - Training Manual and any other training materials provided together with this workbook
 - Your Trainer, Assessor (Slickline Operator), Verifier (FSM) or senior colleagues
 - SOP / Quality Procedures & Processors
2. The completion of this Workbook is a joint effort and responsibility between you and your assessor therefore you have the obligation to request from your assessor to be assessed upon your completion of each topic
3. The completion of this Workbook is part of the MANDATORY requirements which you must fulfill to qualify for a promotion
4. Your training program is mostly self-driven, including this Workbook. It requires individual initiatives, dedication and commitment to complete the process.

NAME	MUHD NUR SELAMAT BIN TAMRIL	 GAZALI MEHRY Operation Manager Dimension Bid (M) Sdn Bhd Labuan Warehouse Slickline Services
DATE OF JOIN	11/11/2024	
CONTACT NO.	0109371028	
RECEIVED DATE	11/11/2025	
DATE COMPLETED		

4/3/25

D. Rig up Wireline Surface Equipment

a. List out all surface equipment (Surface and Pressure Gauge)

1. POWER PACK ✓
2. REEL SKID UNIT ✓
3. COUNTER WHEEL ASSEMBLY ✓
4. ODOMETER / COUNTER DEPTH ✓
5. WEIGHT INDACATOR ✓
6. RIGHT ANGEL DRIVE ✓
7. HAY PULLEY ✓
8. WIRELINE MAST ✓
9. AIR COMPRESSOR ✓
10. GENERATOR SET ✓
11. OFFICE CABIN ✓
12. LUBRICATOR ✓
13. CONTROL PANEL ✓

b. Describe how to connect lubricator section

i) Horizontal

Connect three 8-foot lubricators with stuffing boxes on top, then place the lubricator on the dolly trolley. Put a lifting clamp on the lubricator's upper part. Depending on the wireline work to be done, assemble the necessary number of sections for use above and below the BOP. This way, the lubricator assembly's topmost section will have the smallest internal diameter, if any, and the bottommost section will have the largest internal diameter. Hand tighten all the fast connections. ✓

[Signature]
GAZALI MEHRY
 Operation Manager
 Dimension Bid (M) Sdn Bhd
 Labuan Warehouse
 Slickline Services

4/3/25




ii) Vertical


Attach the adaptor or lubricator riser to the tree cap connector, as appropriate. Attaching the chain block to the other end of the rope that the assistant is holding on the gin pole is the responsibility of the wireline assistance on the wireline deck. Attach the chain block's lifting hook firmly to the lubricator lifting clamp. Pull the chain on the chain block to raise the lubricator to the necessary height for stabbing onto the adaptor or Christmas tree.



Note: Provide drawing and parts description on separate paper/page

c. Sketch the equipment required while rigging up from x-mas tree until stuffing box

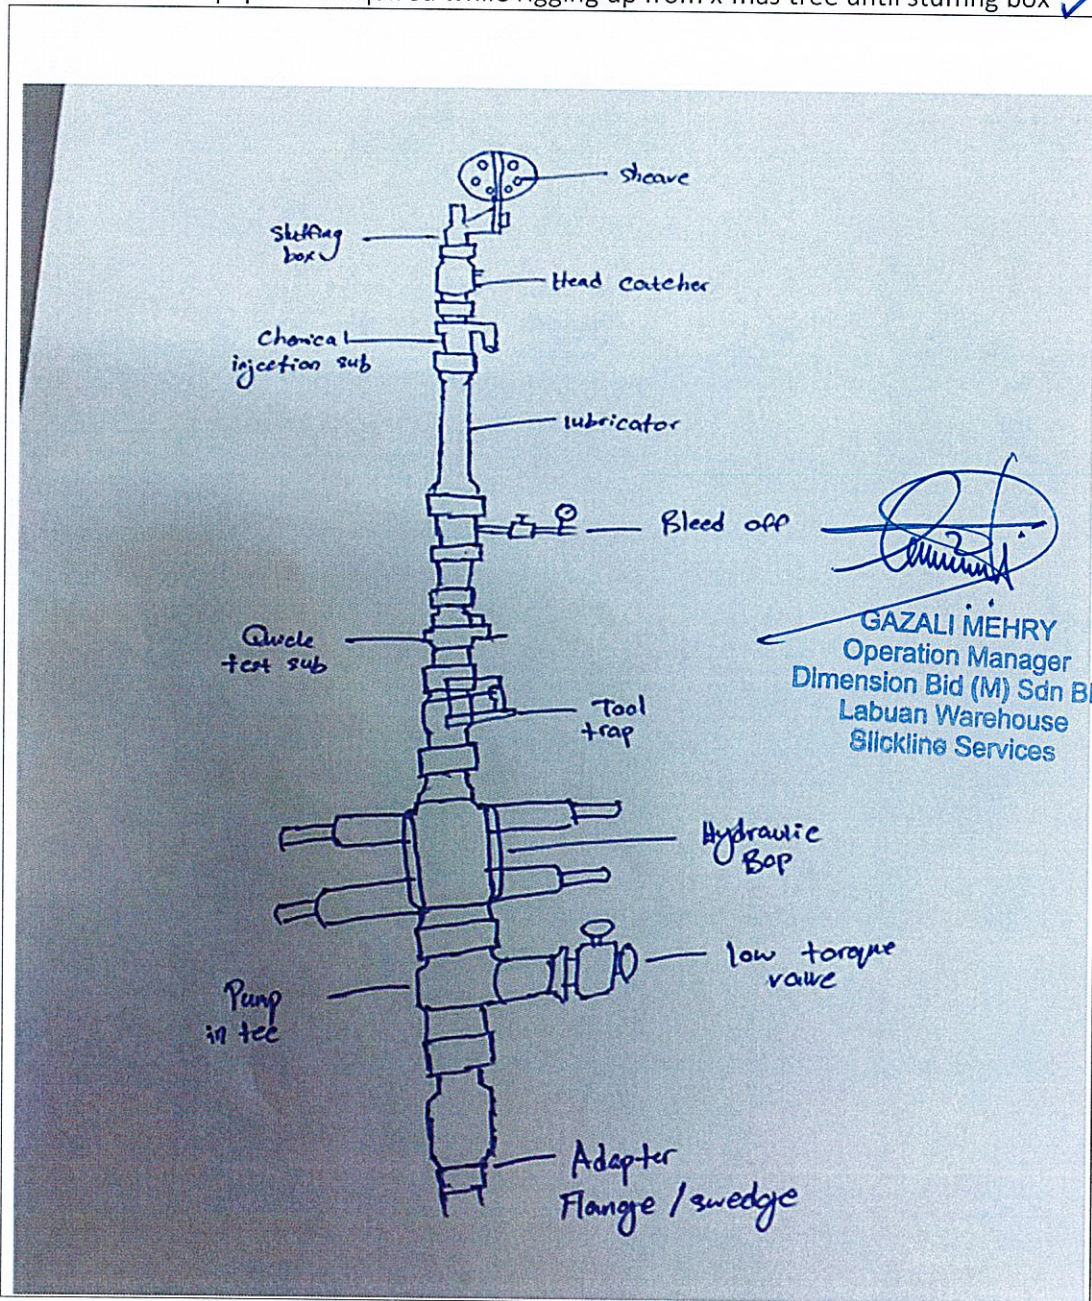


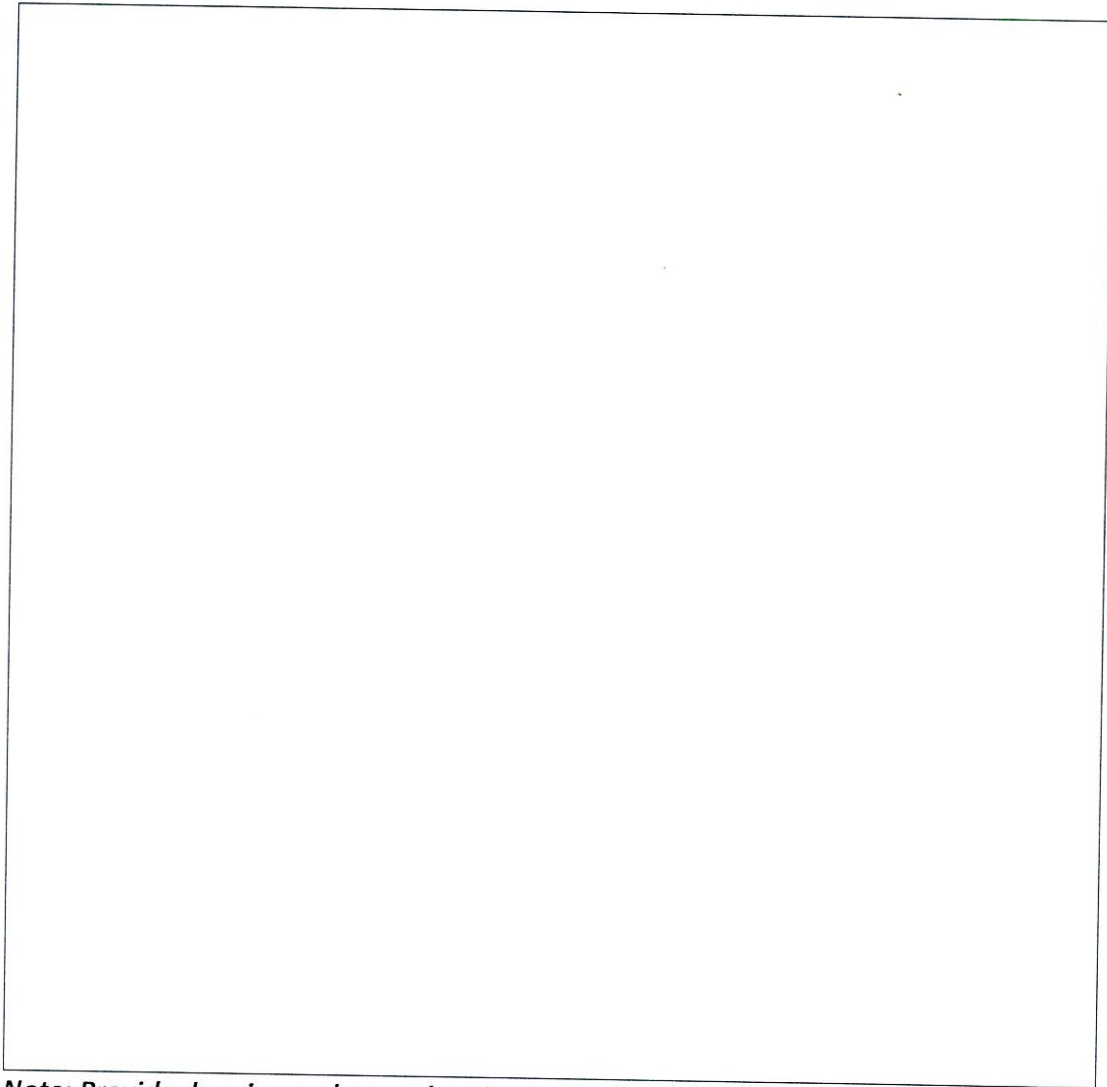

Note: Provide drawing and parts description on separate paper/page

d. What should weight indicator attached with?

- Load cell ✓
- Hay pulley ✓


GAZALI MEHRY
Operation Manager
Dimension Bid (M) Sdn Bhd
Labuan Warehouse
Slickline Services

4/8/25



e. What is the meaning of rigging up and rigging down?

- Rig up: prepare all equipment for operation ✓
- Rig down: disassemble equipment ready for de-mob / move to other location ✓

f. What is power pack hose size used at Dimension Bid?

- 1" ✓
- 1 1/2" ✓
- 3/8" ✓

g. What are the safety precautions required upon completed hook up hydraulic hose to RSU

- Make sure the lock ring is in place ✓
- No leaking ✓
- Make sure the connection is properly connected ✓

h. List out the safety precaution while rigging up and rigging down

- Make sure working area is in safe and clean condition ✓
- Barricade work area and display 'WIRELINE ACTIVITY IN PROGRESS' signage ✓
- Make up surface equipment as per client safety requirement ✓

Note: Provide drawing and parts description on separate paper/page


GAZALI MEHRY
Operation Manager
Dimension Bid (M) Sdn Bhd
Labuan Warehouse
Slickline Services



DIMENSION BID
WELL INTERVENTION | PERFORATION SERVICES
