

SLICKLINE ASSISTANT

WORKBOOK

IMPORTANT NOTE:


1. Your point of reference to complete this workbook may be obtained from the following
 - Training Manual and any other training materials provided together with this workbook
 - Your Trainer, Assessor (Slickline Operator), Verifier (FSM) or senior colleagues
 - SOP / Quality Procedures & Processors
2. The completion of this Workbook is a joint effort and responsibility between you and your assessor therefore you have the obligation to request from your assessor to be assessed upon your completion of each topic
3. The completion of this Workbook is part of the MANDATORY requirements which you must fulfill to qualify for a promotion
4. Your training program is mostly self-driven, including this Workbook. It requires individual initiatives, dedication and commitment to complete the process.

NAME	RYAN GIA SMITH
DATE OF JOIN	22.01.2024
CONTACT NO.	010-9699122
RECEIVED DATE	31.01.2024
DATE COMPLETED	18.03.2024

C. DOWNHOLE EQUIPMENT


1. List out all basic running and pulling tools

No.	Items
1	RB (pulling tool)
2	RS (pulling tool)
3	RJ (pulling tool)
4	SB (pulling tool)
5	SS (pulling tool)
6	SSJ (pulling tool)
7	GS (pulling tool)
8	GSL (pulling tool)
9	GR (pulling tool)
10	GU (pulling tool)
11	JDC (pulling tool)
12	JDS (pulling tool)
13	JUS (pulling tool)
14	JUC (pulling tool)
15	JUL (pulling tool)
16	PCE HD (pulling tool)
17	X-LINE (running tool)
18	JK (running tool)
19	QXD (running tool)
20	QXT (running tool)

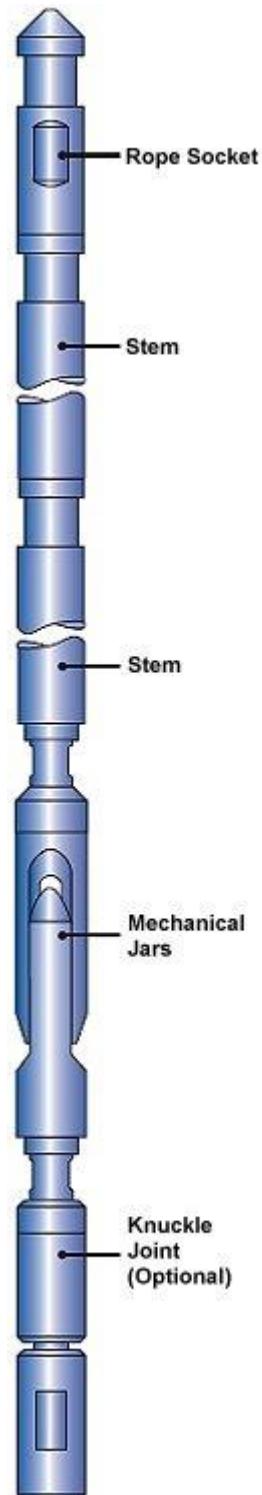

Primary Wireline Tool-string

Tool-string configuration according to requirement. Introduction to

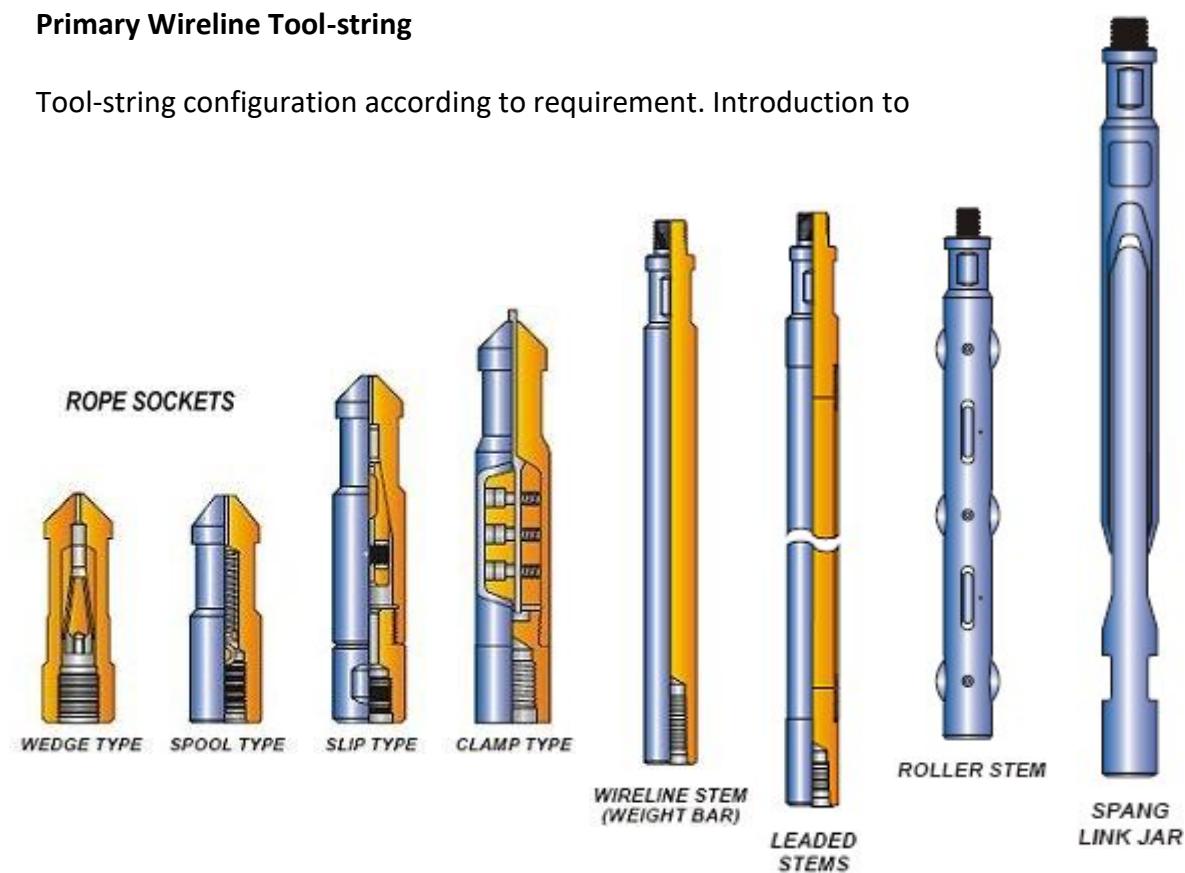

a) rope sockets

The top element of a slickline toolstring, serving as an important connection between the toolstring and the wire.

b) stem lead

Lead-filled stem (No heavy jarring action). Provide greater mass required in wireline operations.

c) tungsten stem

Greater density of heavy-duty stem. used in higher pressure situations in place of traditional stems to supply kinetic energy to support upward and downward jarring impact

d) roller stem

Stem has the same ‘weight’ and ‘mass’ function as the regular stem but is designed with rollers to reduce the friction against the tubing wall in deviated wells. Tool consists of stem with slots to accommodate simple rollers held in position with pins.

e) jars


To deliver effective jarring down or up impacts.

Also known as Stroke jar / Spang jar / Link jar and it has no removable parts.

Composed of two pieces linked together which are free to be extended or collapsed.

Below are two lengths of jar stroke in closed position:

- For 20 inches jar is known as “20 stroke”.
- For 30 inches jar is known as “30 stroke”.

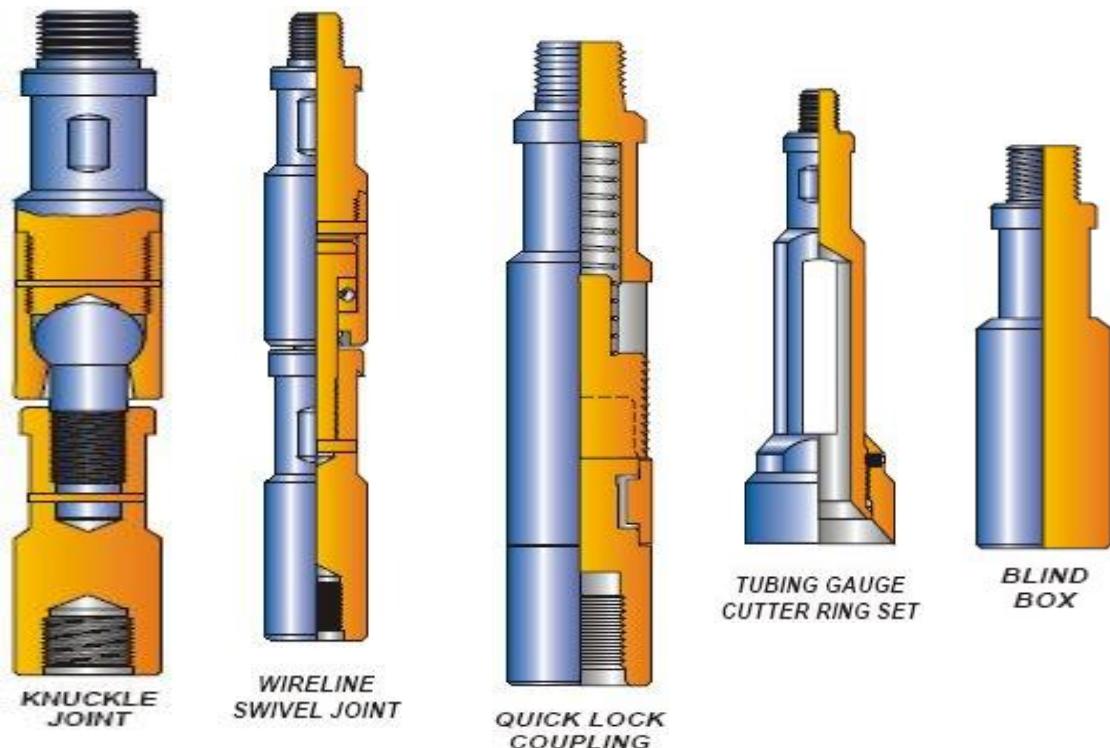

f) knuckle joints

To add flexibility to the tool string and used in deviated well.
 Consists of two bodies which are connected to each other by ball and stem, and external fishing neck at the top sub.

g) swivel joints

Swivel Joint is a wireline accessory used to minimize the effect of twisting wire caused by downhole tools being run. The swivel joint has a bearing incorporated into its design and is used to minimize rotation whilst running in tubing.

h) quick-lock coupling

Quick-lock coupling is to connect two wireline components without the use of wrenches. It allows rapid make-up and break out of toolstrings and eliminates the need for use of pipe wrenches.


Available types: QLS, HD-Quick Release Joint (QRJ) and Trinity.

i) gauge cutter

To check tubing ID, tag total depth, locate the nipple ID and No-Go, cut sand/scale/paraffin from tubing wall. Also known as Tubing Guage/ Guage ring. Can be used to run in hole before running sub-surface equipment.

j) Blind Box

Is used when heavy downward jarring is required to dislodge a fish, or push something down the hole. It is act as 'cutter bar', breaking the wireline at top of the rope socket of the toolstring that cannot be retrieved.

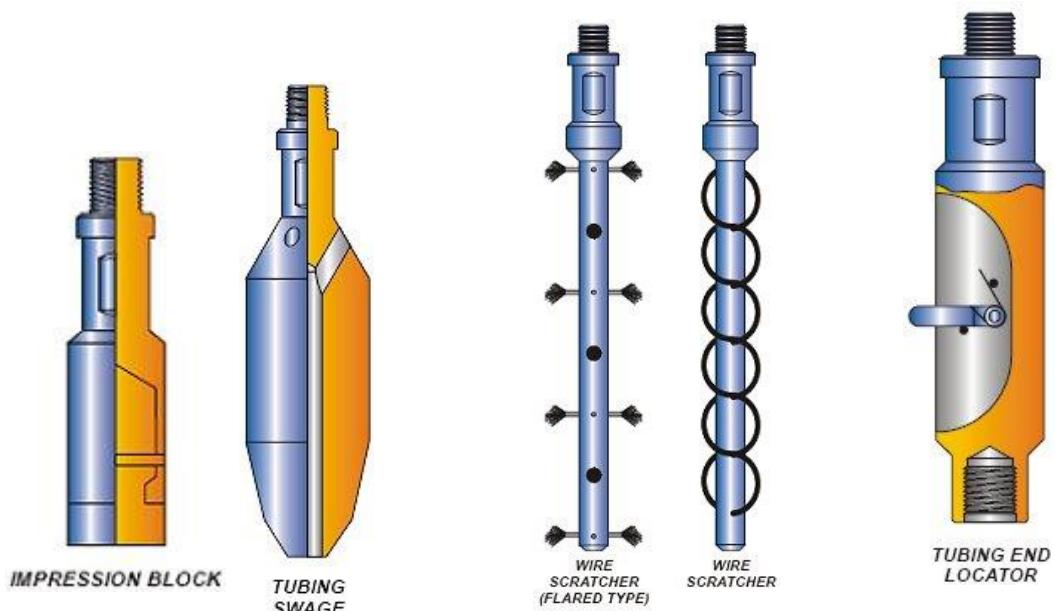

k) lead impression box

Also known as 'bottom-hole camera'. Is used during fishing operations to check the shape or size of the top of fish and to determine the appropriate tool for the fishing operation.

l) **swage**

Swage is used to restore the light collapse in the tubing and to remove large obstructions. It is recommended to run with hydraulic/spring jar to enable the operator to jar up out the tubing if the swage jam.

m) **wire scratcher**

It is a piece of brush-like tool. The function is to clear wax, scale and sand in the tubing wall. Nipple profiles, SSD sleeves and Side Pocket Mandrels. If the wire scratcher not effective in removing the depositions, guage cutter/ring and tubing broach will be used.

n) **tubing end locator**

To measure the depth of the tube end after completion and lock the end.

o) **wire recover tool**

To fish/retrieve the wire

Fill in below Table

A. Size of wire that use in DB 1. 0.108" 2. 0.125" 3. 0.140"	B. Breaking point of each wire ZERON type 1. 0.108" – 2125 lbs 2. 0.125" – 3300 lbs 3. 140" – 4050 lbs
C. Type of wire used in DB 1. ZERON 2. EIPS	D. How to test if wire is good or not 1. Wire pull test 2. Torsion test
E. Why do we need to check the tools before running in hole (RIH)? To ensure tool string is fully functioning	
F. What do we need to do if the tool is damage or lost in hole? <ul style="list-style-type: none"> • Stop work • Discussion must be made with the client representative immediately • Prepare fishing plan 	

G. What do we need to do if equipment failed to work?

- Report to town immediately
- Discussion must be made with the client representative immediately
- Minor troubleshoots
- Major
 - Request for mechanic/technician
 - Request for new equipment (if the equipment fail to function after repair)

INTERVIEW ASSESSMENT FORM (FOR SLICKLINE ASSISTANT)

(Reference: Workbook)

NAME OF EMPLOYEE	Ryan Gia	DATE OF ASSESSMENT	18/7/21
POSITION	TSA		

	RATING (Rating benchmark: SLS Competency Matrix)									
	STRONG			ADEQUATE			IMPROVEMENT NEEDED			
	10	9	8	7	6	5	4	3	2	
C. DOWNHOLE EQUIPMENT (Operation / Maintenance / Troubleshooting)										
1. Basic Toolstring			/							
2. Pulling / Running Tools				/						
3. Wireline Wire			/							
4. Inspection / Maintenance of Tools				/						

Overall Comment:

DIMENSION BID

Assessor		Verified by	
Name	AG MOHD ADILAH ADLI	Name	GAZALI MEHRY Operation Manager Dimension Bid (M) Sdn Bhd Labuan Warehouse Slickline Services
Date	18/7/24	Date	18/7/24

INTERVIEW ASSESSMENT FORM (FOR SLICKLINE ASSISTANT)

(Reference: Workbook)

NAME OF EMPLOYEE	Ryan Gra Smith	DATE OF ASSESSMENT	17.8.24
POSITION	TSA		

	RATING								
	STRONG			ADEQUATE			IMPROVEMENT NEEDED		
	10	9	8	7	6	5	4	3	2
C. DOWNHOLE EQUIPMENT (Operation / Maintenance / Troubleshooting)									
1. Basic Toolstring						✓			
2. Pulling / Running Tools				✓					
3. Wireline Wire					✓				
4. Inspection / Maintenance of Tools					✓				

Overall Comment:

DIMENSION BID

Assessor	Allyson	Verified by	
Name	Alleyson Akin	Name	GAZALI MEHRY
Date	18.7.24	Date	Operation Manager Dimension Bid (M) Sdn Bhd Labuan Warehouse Slickline Services

INTERVIEW ASSESSMENT FORM (FOR SLICKLINE ASSISTANT)

(Reference: Workbook)

NAME OF EMPLOYEE	RYAN GIA SMITH	DATE OF ASSESSMENT	18.7.2024
POSITION	TSA		

	RATING (Rating benchmark: SLS Competency Matrix)								
	STRONG			ADEQUATE			IMPROVEMENT NEEDED		
	10	9	8	7	6	5	4	3	2
C. DOWNHOLE EQUIPMENT (Operation / Maintenance / Troubleshooting)									
1. Basic Toolstring					✓				
2. Pulling / Running Tools						✓			
3. Wireline Wire						✓			
4. Inspection / Maintenance of Tools						✓			

Overall Comment:

DIMENSION BID

Assessor		Verified by	
Name		Name	
Date		Date	GAZALI MEHRY Operation Manager Dimension Bid (M) Sdn Bhd Labuan Warehouse Slickline Services 18/8/24